



Jindao® Antistatic HPL

High Pressure Laminate with a very tough surface, particularly suitable for raised access flooring systems.

Product grades

A4

+ 400 revs

A10

+ 1000 revs

A30

+ 3000 revs

Color pattern

2010

2010-6

2103

2158

2069

2208

Thickness available

1.0 mm

1.2 mm

1.5 mm

Electrical resistance

Antistatic: $1 \times 10^8 \sim 1 \times 10^{11}$

Dissipating: $1 \times 10^6 \sim 1 \times 10^7$

Jindao® Antistatic HPL Technical Information

Abrasion resistance EN438/2.6	400 revs. 1000 revs. 3000 revs.
Dry heat resistance EN438/2.8	OK
Impact resistance - small diameter sphere EN438/2.11	20 N
Stain resistance EN438/2.15	OK degree no important alteration
Resistance to cigarettes EN438/2.18	OK no important alteration
Electrical resistance NFPA 99	antistatic $1 \times 10^8 \sim 1 \times 10^{11}$ Ohms dissipating $1 \times 10^6 \sim 1 \times 10^7$ Ohms
Resistance to immersion in hot water EN438/2.7	6 %
Dimensional stability at high temperatures EN438/2.9	0.5 L 1.0 T %
Scratch resistance EN438/2.14	2.5 N
Colour fastness under light EN438/2.16	6 degree
Resistance to steam EN438/2.24	OK no important alteration
Density DIN 53 479	1400 Kg/m ³

Top Photo

Raised access flooring:

Raised access floors with
HPL finish.

A4 2010 1.2mm Antistatic
HPL

Bottom photo

Raised access flooring:

Raised access floor panels.

A4 2010 1.2mm Antistatic
HPL



Order information:

Order format example: Jindao® HPL A4, 2010, 1.2mm, Antistatic.

HPL dimension: 610 x 610 mm.

Order quantity: with a minimum quantity order requirement.

JINDAO FLOORS, INC.

ADDRESS: Xiyou Town Government, Laizhou City, Shandong
Province, China 261418


TEL: +86-535-274-3446

FAX: +86-535-274-3449

E-mail: info@jindaofloors.com

URL: <http://www.jindaofloors.com/>

Jindao® Antistatic HPL

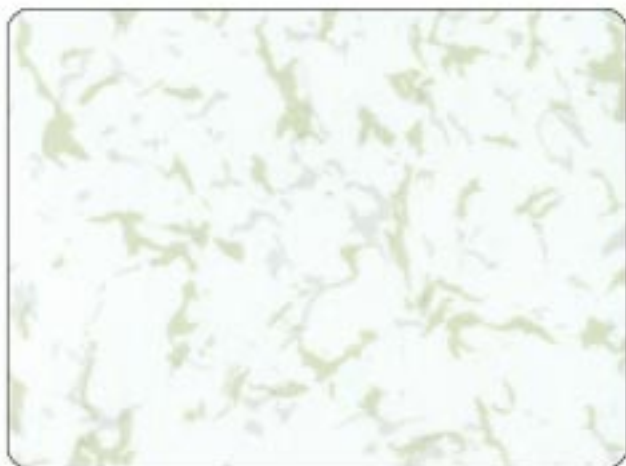

2010



2010-6



2103



2158



2208



2069